
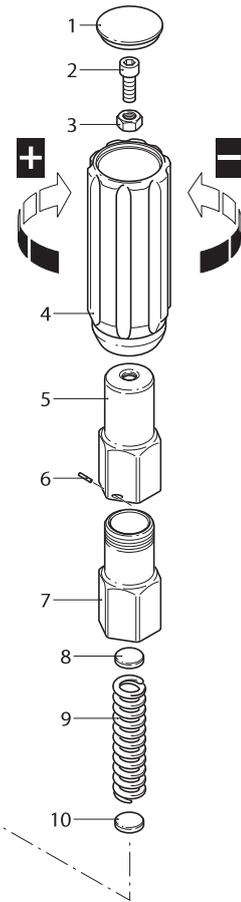




VR 3B for RK series

300 bar

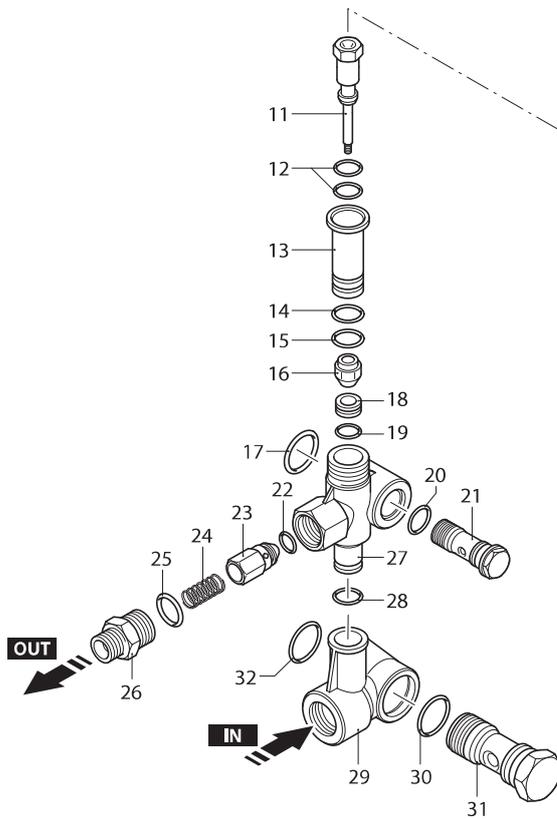

UN003200-GQ

KIT RICAMBI / PART KITS

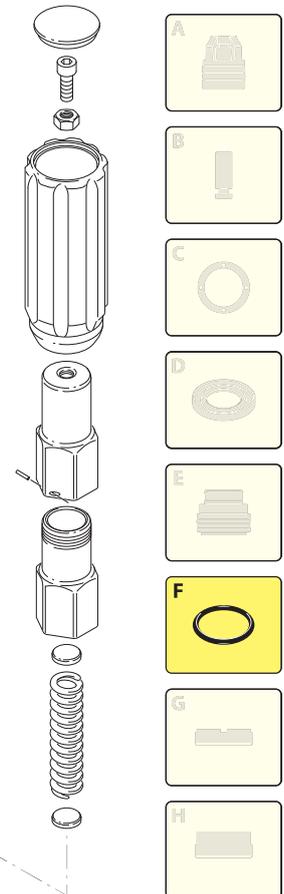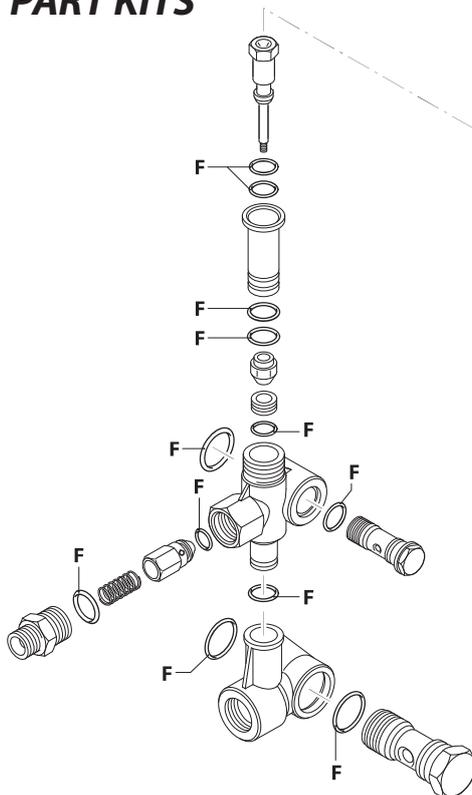

UN003201-BU



Pos.	Cod.	Denominazione	Description	Qt	Note	Pos.	Cod.	Denominazione	Description	Qt	Note
1	1560580	Tappo	Plug	1							
2	540290	Vite	Screw	1							
3	1660210	Dado	Nut	1							
4	1560400	Manopola	Knob	1							
5	1560420	Vite	Screw	1	☒						
6	1080070	Spina	Pin	1							
7	2260330	Guida	Guide	1	⊕C=35Nm						
8	2260140	Piattello	Wobble plate	1							
9	1560350	Molla	Spring	1							
10	2260340	Piattello	Wobble plate	1							
11	2260060	Pistone	Piston	1							
12	2260100	Guarnizione OR Ø 6,02x2,62	O-ring	2	☒90Sh						
13	2260040	Guida pistone	Piston guide	1							
14	740290	Guarnizione OR Ø 14x1,78	O-ring	1							
15	394280	Guarnizione OR Ø 12,42x1,78	O-ring	1							
16	2761290	Pistone	Piston	1	☒C=3Nm						
17	2260190	Guarnizione OR Ø 20,29x2,62	O-ring	1	90Sh						
18	2260080	Sede	Seat	1							
19	1260740	Guarnizione OR Ø 10,77x2,62	O-ring	1							
20	390080	Guarnizione OR Ø 11,91x2,62	O-ring	1							
21	1540272	Vite 3/8" G ottone	Screw	1	C=30Nm						
22	1560151	Guarnizione OR Ø 5,94x3,53	O-ring	1	90 Sh						
23	1560890	Otturatore	Shutter	1							
24	1560140	Molla	Spring	1							
25	180101	Guarnizione OR Ø 17,5x2	O-ring	1							
26	1560111	Raccordo 1/2" G - 3/8" G	Fitting	1	⊕C=35Nm						
27	2260170	Corpo valvola	Valve body	1							
28	390080	Guarnizione OR Ø 11,91x2,62	O-ring	1							
29	1540470	Collettore 1/2" G (F)	Suction fitting	1							
30	1540440	Collettore 1/2" NPT (F)	Suction fitting	1							
31	880270	Guarnizione OR Ø 17,17x1,78	O-ring	1							
32	1540360	Vite 1/2" G	Screw	1	C=40Nm						
32	1540630	Guarnizione OR Ø 23,47x2,62	O-ring	1							

KIT RICAMBI - PART KITS

F=KIT 2505 OR O-rings							
Pos.	Q.ty	Pos.	Q.ty	Pos.	Q.ty	Pos.	Q.ty
12	2	25	1				
14	1	28	1				
15	1	30	1				
17	1	32	1				
19	1						
20	1						
22	1						

SIMBOLOGIA - SYMBOLS

VR 3B
cod. 22308
MAX 300 bar, 35 l/min
INLET: 1/2" G (F)
OUTLET: 3/8" G (M)

Pos.	Q.ty	Pos.	Q.ty	Pos.	Q.ty	Pos.	Q.ty

- C Tolleranza coppia di serraggio +0÷-10% / Tightening torque tolerance +0÷-10%
- ⊕ Avvitare con Loxeal 55-14 / Screw with Loxeal 55-14
- ☒ Lubrificare con grasso Molykote PG54 / Lubricate with grease Molykote PG54
- ☒ Avvitare con Loxeal 83-21 frenafletti FORTE / Screw with Loxeal 83-21 thread lock STRONG