
## Straight male stud coupling BSP cylindrical



Stainless Steel AISI 316-L

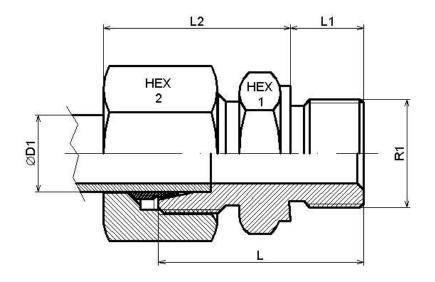

Part n <sup>o</sup>	ØD1	Serie	R1	Working Pressure (bar)	L	L1	L2	HEX 1	HEX 2
Z AL 6 R 1/4	6	L	1/4" BSP	315	29	12	25	19	14
Z AL 6 R 3/8	6	L	3/8" BSP	315	30,5	12	26,5	22	14
Z AL 8 R 1/4	8	L	1/4" BSP	315	29	12	25	19	17
Z AL 10 R 1/8	10	L	1/8" BSP	315	25,5	8	25,5	17	19
Z AL 10 R 1/4	10	L	1/4" BSP	315	30	12	26	19	19
Z AL 10 R 3/8	10	L	3/8" BSP	315	31,5	12	27,5	22	19
Z AL 12 R 3/8	12	L	3/8" BSP	315	31,5	12	27,5	22	22
Z AL 12 R 1/2	12	L	1/2" BSP	315	34	14	28	27	22
Z AL 15 R 3/8	15	L	3/8" BSP	315	32,5	12	29	24	27
Z AL 15 R 1/2	15	L	1/2" BSP	315	35	14	29	27	27
Z AL 15 R 3/4	15	L	3/4" BSP	315	38	16	30	32	27
Z AL 18 R 1/2	18	L	1/2" BSP	315	36	14	31	27	32
Z AL 18 R 3/4	18	L	3/4" BSP	315	38	16	31	32	32
Z AL 22 R 1/2	22	L	1/2" BSP	160	38	14	33	32	36
Z AL 22 R 3/4	22	L	3/4" BSP	160	40	16	33	32	36
Z AL 35 R 1 1/4	35	L	1"1/4 BSP	160	48	20	39	50	50
Z AS 6 R 1/4	6	S	1/4" BSP	630	32	12	28	19	17
Z AS 6 R 3/8	6	S	3/8" BSP	630	35	12	31	22	17
Z AS 8 R 1/4	8	S	1/4" BSP	630	34	12	30	19	19
Z AS 8 R 1/2	8	S	1/2" BSP	630	36	14	30	27	19
Z AS 10 R 1/4	10	S	1/4" BSP	630	34	12	31	19	22
Z AS 10 R 3/8	10	S	3/8" BSP	630	34,5	12	31	22	22
Z AS 10 R 1/2	10	S	1/2" BSP	630	39	14	34	27	22
Z AS 12 R 1/4	12	S	1/4" BSP	630	36	12	33	22	24
Z AS 12 R 3/8	12	S	3/8" BSP	630	36,5	12	33,5	22	24
Z AS 14 R 3/8	14	S	3/8" BSP	630	38,5	12	36,5	24	27
Z AS 14 R 1/2	14	S	1/2" BSP	630	41	14	37	27	27

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.

## Straight male stud coupling BSP cylindrical

Stainless Steel AISI 316-L



2/2

Part nº	ØD1	Serie	R1	Working Pressure (bar)	L	L1	L2	HEX 1	HEX 2
Z AS 16 R 3/8	16	S	3/8" BSP	400	38,5	12	36,5	27	30
Z AS 16 R 1/2	16	S	1/2" BSP	400	41	14	37	27	30
Z AS 16 R 3/4	16	S	3/4" BSP	400	45	16	39	32	30
Z AS 20 R 1/2	20	S	1/2" BSP	400	45	14	42	32	36
Z AS 20 R 3/4	20	S	3/4" BSP	400	47	16	42	32	36
Z AS 25 R 3/4	25	S	3/4" BSP	400	51	16	47	41	46
Z AS 25 R 1	25	S	1" BSP	400	53	18	47	41	46
Z AS 30 R 1	30	S	1" BSP	400	55	18	50	46	50
Z AS 30 R 1 1/2	30	S	1"1/2 BSP	400	64	22	55	55	50
Z AS 38 R 1 1/4	38	S	1"1/4 BSP	315	62	20	57	55	60

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.