


WARNING!
 SECTIONS OF THE ASSEMBLY MARKED
 AND MUST BE SHIELDED BY AN INTERACTIVE GUARDING SYSTEM
 BINACCHI S.p.A. DECLINES RESPONSIBILITY IF PROPER GUARD
 ARE NOT PROVIDED OR MAINTAINED.



TIPD-TYPE
 Typ

B6

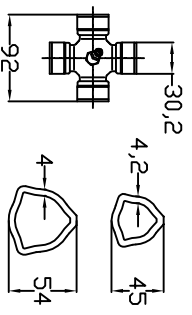

CLIENTE-CUSTOMER-CLIENT-KUNDE

DANI-TECH A/S -DK-


RIF.CLIENTE-CUSTOMER REF.-REF.CLIENT-BEZUG KUNDE

ORIGINE

MODIFICHE-MODIFICATIONS-ÄNDERUNGEN-MODIFICACIONES

POTENZA : 64 Cv (540 g/min)
 COPPIA : 830 Nm (540 g/min)

NOTE :

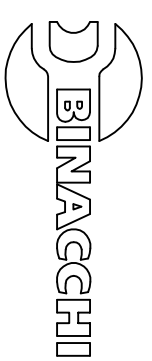

CODICE C.E.D.
 B6N121CEA60A60

DATA
 26/06/13

VISTO