
## Straight male stud coupling BSP cylindrical with captive seal, only body

Stainless Steel AISI 316-L



1/2

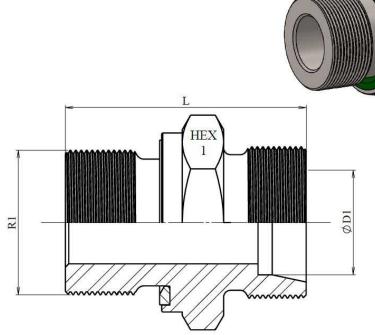

Part n <sup>o</sup>	ØD1	Serie	R1	Working	L	HEX 1
				Pressure (bar)		
Z STA AL 6 R 1/8WD	6	L	1/8" BSP	315	23,5	14
Z STA AL 6 R 1/4WD	6	L	1/4" BSP	315	29	19
Z STA AL 8 R 1/8WD	8	L	1/8" BSP	315	24	14
Z STA AL 8 R 1/4WD	8	L	1/4" BSP	315	28	19
Z STA AL 8 R 3/8WD	8	L	3/8" BSP	315	29,5	22
Z STA AL 10 R 1/8WD	10	L	1/8" BSP	315	25,5	17
Z STA AL 10 R 1/4WD	10	L	1/4" BSP	315	30	19
Z STA AL 10 R 3/8WD	10	L	3/8" BSP	315	31,5	22
Z STA AL 10 R 1/2WD	10	L	1/2" BSP	315	33	27
Z STA AL 12 R 1/4WD	12	L	1/4" BSP	315	31	19
Z STA AL 12 R 3/8WD	12	L	3/8" BSP	315	31,5	22
Z STA AL 12 R 1/2WD	12	L	1/2" BSP	315	34	27
Z STA AL 15 R 3/8WD	15	L	3/8" BSP	315	32,5	24
Z STA AL 15 R 1/2WD	15	L	1/2" BSP	315	35	27
Z STA AL 15 R 3/4WD	15	L	3/4" BSP	315	38	32
Z STA AL 18 R 3/8WD	18	L	3/8''BSP	315	33,5	32
Z STA AL 18 R 1/2WD	18	L	1/2" BSP	315	36	27
Z STA AL 18 R 3/4WD	18	L	3/4" BSP	315	38	32
Z STA AL 22 R 1/2WD	22	L	1/2" BSP	160	38	32
Z STA AL 22 R 3/4WD	22	L	3/4" BSP	160	40	32
Z STA AL 22 R 1WD	22	L	1" BSP	160	43	41
Z STA AL 28 R 3/4WD	28	L	3/4" BSP	160	41	41
Z STA AL 28 R 1WD	28	L	1" BSP	160	43	41
Z STA AL 35 R 1WD	35	L	1" BSP	160	46	50
Z STA AL 35 R 1 1/4WD	35	L	1" 1/4 BSP	160	48	50
Z STA AL 42 R 1 1/2WD	42	L	1" 1/2 BSP	160	52	55
Z STA AS 6 R 1/4WD	6	S	1/4 BSP	630	33	19

The information gathered in this technical documentation (Catalogue) has an informative character and can be modified without previous notice. DICSA will not accept any type of responsibility resulting from an inappropriate use of the product, except the ones related to manufacturing defects.

## Straight male stud coupling BSP cylindrical with captive seal, only body

Stainless Steel AISI 316-L



2/2

Part nº	ØD1	Serie	R1	Working Pressure (bar)	L	HEX 1
Z STA AS 8 R 1/4WD	8	S	1/4 BSP	630	34	19
Z STA AS 8 R 3/8WD	8	S	3/8" BSP	630	34,5	22
Z STA AS 10 R 1/4WD	10	S	1/4" BSP	630	34	19
Z STA AS 10 R 3/8WD	10	S	3/8" BSP	630	34,5	22
Z STA AS 10 R 1/2WD	10	S	1/2" BSP	630	37	27
Z STA AS 12 R 1/4WD	12	S	1/4" BSP	630	35	22
Z STA AS 12 R 3/8WD	12	S	3/8" BSP	630	36,5	22
Z STA AS 12 R 1/2WD	12	S	1/2" BSP	630	39	27
Z STA AS 14 R 3/8WD	14	S	3/8" BSP	630	39	27
Z STA AS 14 R 1/2WD	14	S	1/2" BSP	630	41	27
Z STA AS 16 R 3/8WD	16	S	3/8 BSP	400	38,5	27
Z STA AS 16 R 1/2WD	16	S	1/2" BSP	400	42	27
Z STA AS 16 R 3/4WD	16	S	3/4" BSP	400	43	32
Z STA AS 20 R 1/2WD	20	S	1/2 BSP	400	45	32
Z STA AS 20 R 3/4WD	20	S	3/4" BSP	400	47	32
Z STA AS 25 R 3/4WD	25	S	3/4" BSP	400	51	41
Z STA AS 25 R 1WD	25	S	1"BSP	400	54	41
Z STA AS 30 R 1WD	30	S	1" BSP	400	55	46
Z STA AS 30 R 1 1/4WD	30	S	1" 1/4 BSP	400	57	50
Z STA AS 38 R 1 1/4WD	38	S	1" 1/4 BSP	315	62	55
Z STA AS 38 R 1 1/2WD	38	S	1"1/2 BSP	315	64	55